


TEMPERED GLASS

- ◆ Impact Safety-Rated: Complies With IBC Requirements for Use in Doors. Meets ANSI Z97.1 Class A and CPSC 16CFR 1201 (CAT I and II)
- ◆ 1/4" Thick Clear Heat Treated Glass
- ◆ Approximately 4 Times Stronger Than Annealed (Ordinary) Glass
- ◆ Breaks Into Small Harmless Fragments
- ◆ Can NOT Be Cut After Manufacturing
- ◆ 11" Minimum Height
- ◆ Manufactured in USA
- ◆ NOT Fire-Rated
- ◆ STC 31 Rating

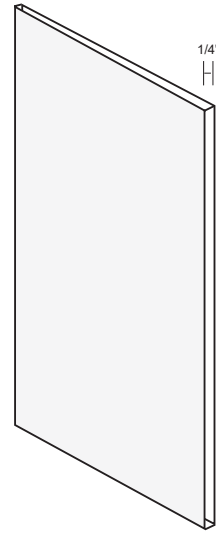

INSULATED TEMPERED GLASS

- ◆ Impact Safety-Rated: Complies With IBC Requirements for Use in Doors. Meets ANSI Z97.1 Class A and CPSC 16CFR 1201 (CAT I and II)
- ◆ 1" Thick - Consists of Two Pieces of 1/4" Thick Clear Tempered Glass With 1/2" Air Space Between and Butyl Seal
- ◆ Increased Energy Efficiency
- ◆ Approximately 4 Times Stronger Than Annealed (Ordinary) Glass
- ◆ Breaks Into Small Harmless Fragments
- ◆ Can NOT Be Cut After Manufacturing
- ◆ Manufactured in USA
- ◆ 5-Year Manufacturer Warranty
- ◆ NOT Fire-Rated
- ◆ STC 35 Rating

